


Twin-Tyred Flexible Isolation Plug

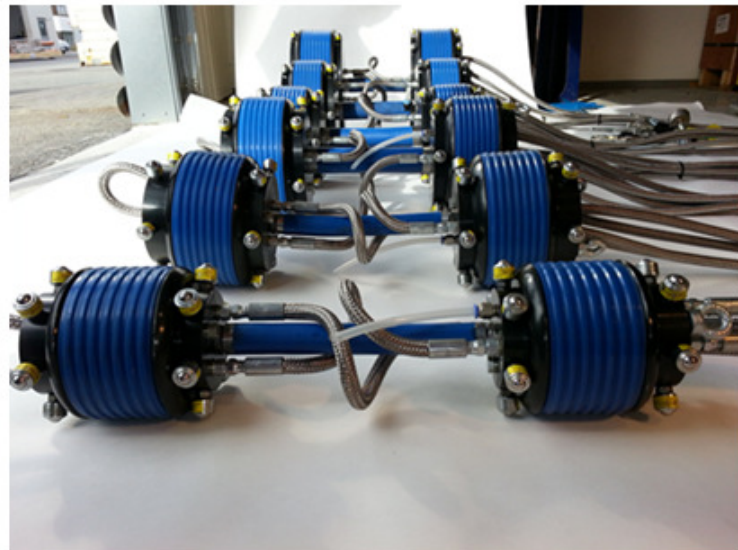

Product specification

- Pipe ID Range: 4" to 48"
- Max Differential Pressure: 3-5 Bar.g
- Test Fluid: Water or Nitrogen
- By-pass / Purge function: Yes
- Pipe Orientation: Any
- Negotiate bends: Yes
- Means of installation/Removal: Mechanical means (Push/Pull)
- Means of activating: Hydraulic (Water)

The Multi Plug or Twin-Tyred Flexible Isolation Plug's main function is to provide a double block & bleed (DB&B™) isolation with by-pass or inert gas purge function during welding. This tool will provide the user with the possibility for weld isolation past bends due to the flexible by-pass connection hose.