




## SubSea Tensioner

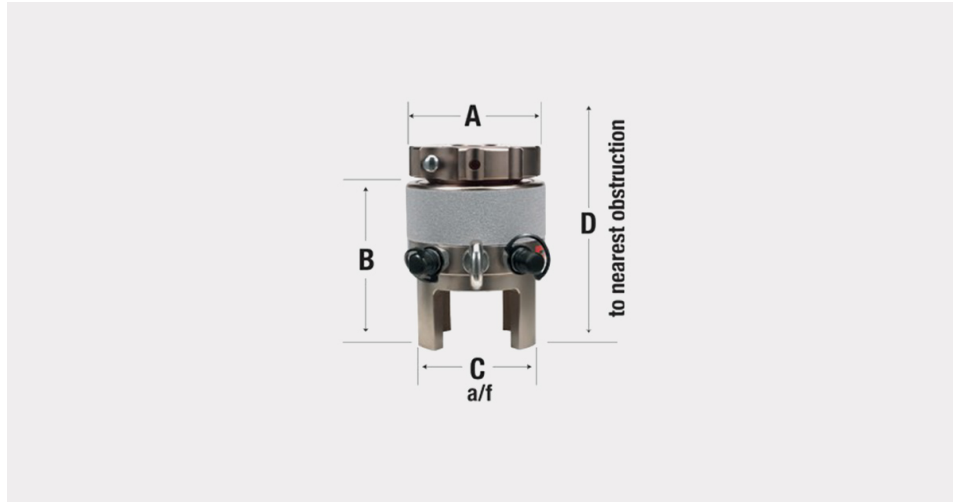

### Introduction

#### Product specification:

- Load cell: SST1 to SST7
- Imperial: 3/4" to 3-1/2"
- Min Bolt Protrusion: 107 to 188 mm
- Max tool pressure: 1500 bar
- Tool load: 140 kN to 2575 kN
- Diameter (A): 66 to 217 mm
- Bridge height (B): 97 to 202 mm
- Bridge OD (C): 48 to 202 mm
- Tool removal height (D): 228 to 409 mm
- Adapter: 1/4" CEJN

#### Designed to fit:

- BS1560
- ANSI B16.5
- API
- Compact flanges


#### Additional accessories:

- Pump air/hydraulic or electric/hydraulic
- 1/4" CEJN hose

Available as a complete set with standard accessories, or tools can be customized to your needs.



## SubSea Tensioner

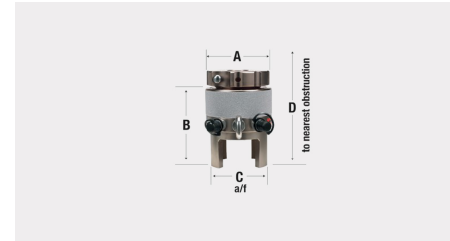

### Contact for this product is:

**Tore Gjøse:** Torque & Pressure Technology Manager - IK Norway  
T: +47 51 44 67 17

